

SCREWLESS TYPE TERMINAL BLOCK

E133988(R)

ETB6D SERIES

SCREWLESS TYPE

PITCH=3.81mm

FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

SPECIFICATIONS


- Pitch 3.81mm
- Wire range 28~16 AWG (1.5mm²)
- No. of pole per block 2P to 20P
- Rating 8 Amp, 300 VAC
- Housing PA66
- Terminals Tin plated over Brass
- Springs Stainless Steel
- Push button PA66
- Operating temperature -30°C ~+110°C
(includes temperature rise limit)
- Stripping length 9mm
- UL Approval 300V, 8A, 28~16 AWG



PART NUMBERING SYSTEM

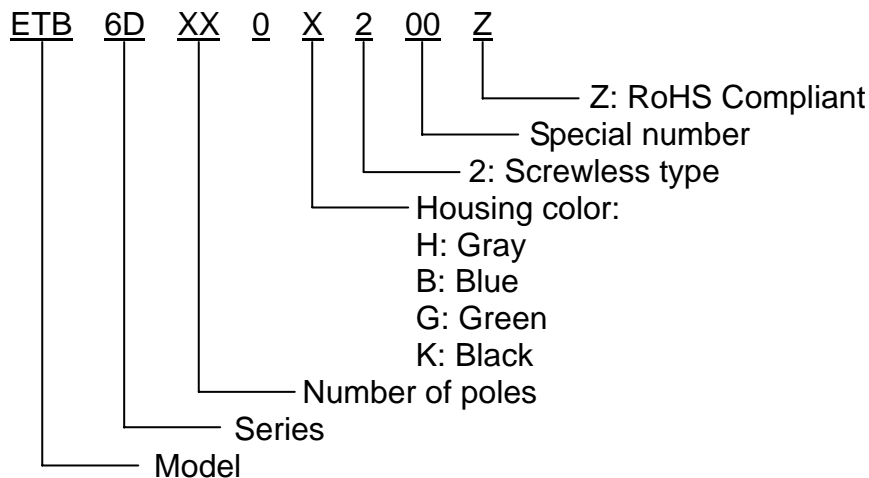

■ DRAWING

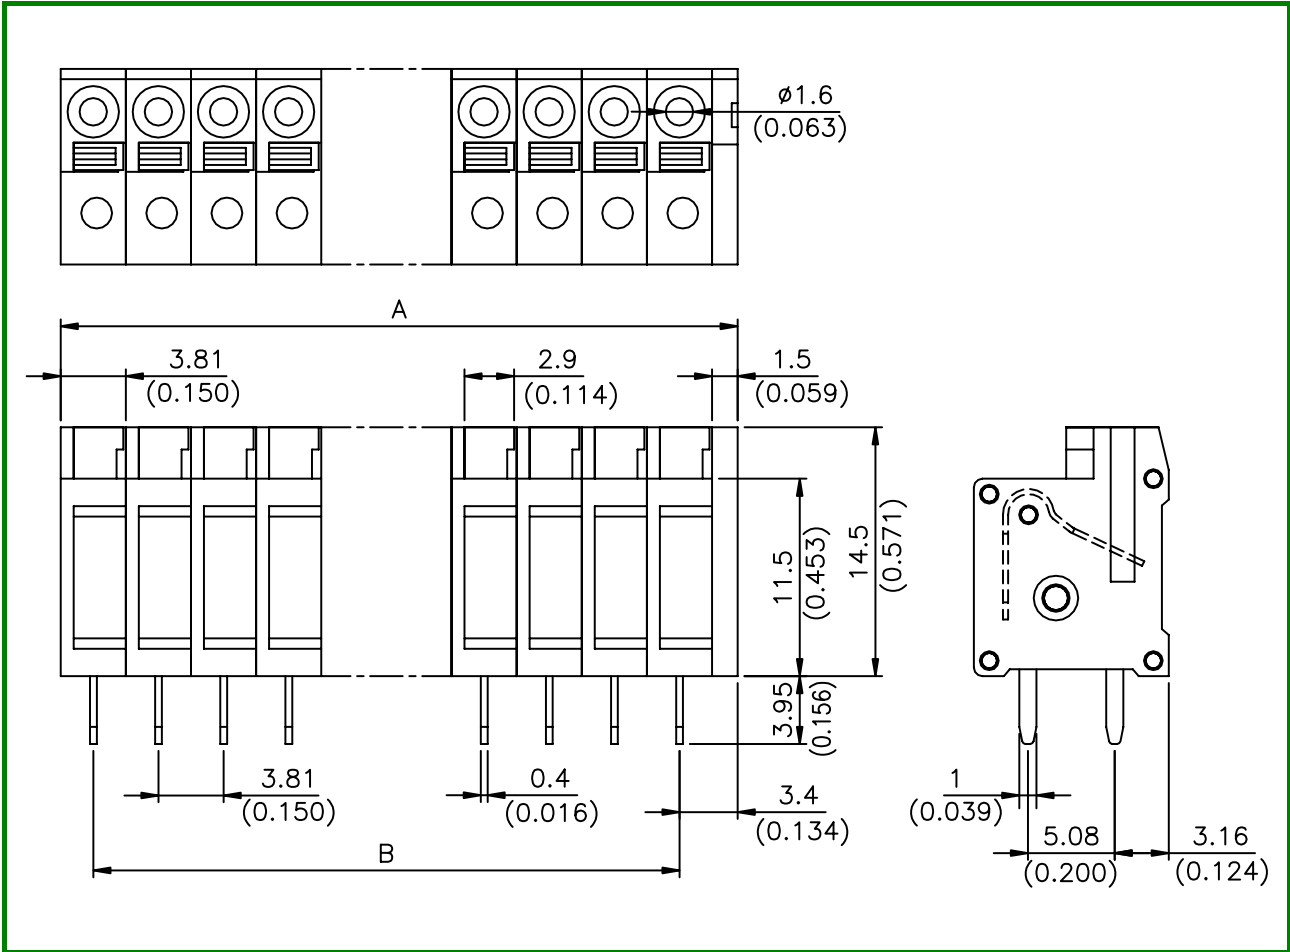

| POLE DIM. | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
|-----------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| A | 9.12 (0.359) | 12.93 (0.509) | 16.74 (0.659) | 20.55 (0.809) | 24.36 (0.959) | 28.17 (1.109) | 31.98 (1.259) | 35.79 (1.409) | 39.60 (1.559) | 43.41 (1.709) | 47.22 (1.859) | 51.03 (2.009) |
| B | 3.81 (0.150) | 7.62 (0.300) | 11.43 (0.450) | 15.24 (0.600) | 19.05 (0.750) | 22.86 (0.900) | 26.67 (1.050) | 30.48 (1.200) | 34.29 (1.350) | 38.10 (1.500) | 41.91 (1.650) | 45.72 (1.800) |
| POLE DIM. | 14 | 15 | 16 | 17 | 18 | 19 | 20 | | | | | |
| A | 54.84 (2.159) | 58.65 (2.309) | 62.46 (2.459) | 66.27 (2.609) | 70.08 (2.759) | 73.89 (2.909) | 77.70 (3.059) | | | | | |
| B | 49.53 (1.950) | 53.34 (2.100) | 57.15 (2.250) | 60.96 (2.400) | 64.77 (2.550) | 68.58 (2.700) | 72.39 (2.850) | | | | | |